

HM-5818 specification

| Standard | HM-5818 |
|---------------------------|--|
| | IEC 60945, IEC61174 (ECDIS), IEC 60529 (IP20), IEC 61162-1, IEC 61162-2, IEC 62288, 2014, IMO A.694 (17), IMO MSC.232(82), IHO S-52, IHO S-57, IHO S-63, IHO S-64, CCS GD 22 Guide for the acceptance test of electrical and electronic products. CCS GD 06 Guide for inspection of electronic chart display and information system (ECDIS). International Maritime Organization navigation safety sub committee NO.266 circular. <electronic chart display and information system software maintenance> |
| Operation System | Linux |
| Software Language | English, Chinese |
| Electronic Nautical Chart | IHO S-57 Ed 3.1 Vector Chart (Support IHO S-63 Data Protection Scheme). It support the official S-57 / S-63 electronic chart which is distributed by the UK hydrographic office (UKHO), the China's maritime bureau and so on. And it also support the Yangtze river hydrographic electronic navigation chart database. |
| Chart Installation | Install Base/Update S-57/S-63 ENC packages from USB. |
| Manual Update | Add/Modify/Delete objects on the SENCs. Manual updates can be distinguished from automatic updates on the screen on demand. |
| Object Information | Select objects on the charts with cursor, and query informations associated(Texts, pictures, and symbol explanations). |
| ECIDS Chart 1 | The system provides a demonstration chart for new users to learn and familiarize themselves with the S-57 electronic chart and corresponding symbols. |
| Planned Route | Rhumb line/Great circle line, generates wheel-over-line according to configuration. |
| Route Detection | Detects the following objects which specific planned route crosses, Navigational hazards. Areas for which special conditions exist. Safety contours. Any object of above detected will be highlighted to mariners. |
| Route Monitoring | Route monitoring detects the following conditions for own ship, Cross track error. Navigational hazards. Areas for which special conditions exist. Safety contours. Indication or warning will be given to mariners if any condition of above happens. |
| Color Palette | Day/Dusk/Night |
| Display Mode | 3 display categories are predefined-Base/Standard/Other. Each category can be customized by mariners to show or suppress some informations of chart. |
| Text Display Setting | Provides switch options like import text, light description, Seabed nature, place name etc. Allows mariner to show or suppress some texts of chart. |
| User's Note | Information (i) or warning(!) label could be marked at specific position. |
| User's Object | Mariners' concerned point/line/area could be drawn on the chart. |
| MOB | When emergency(like MOB) happening, MOB button on the screen can be clicked to record the position of own ship. |
| Own Ship Positioning | Support primary/secondary position source. Last valid position or LOP can be used as start position for dead rocking. |
| Voyage Record | Voyage records for last 3 months (position, time, course, speed). Records for last 12 hours are detailed, includes informations of referenced ENCS. |
| Alarm | Alarm or warning for route monitoring, sensor failure, ENC, CPA etc. will be given according to configured priority. Mariners can view and confirm alarms which they received. |
| Measure Tool | EBL/EBRL/VRM |
| AIS Target | <ul style="list-style-type: none"> • AIS target query and monitoring. • Condition setting(CLASS A/B, range, CPA) for activated or sleeping AIS targets to filter unconcerned ones. • Past track for AIS target. • CPA/TCPA alarm. |
| Sensor | Support NMEA0813 input device like GPS, AIS, echo sounder, gyro, log and so on. |
| Operation Unit | |
| Operation Unit (Optional) | Size, 343mm x 105mm, IP65 Static waterproof dustproof explosion-proof, Stainless steel metal industrial keyboard, built-in industrial-grade IMG PCB, embedded instalation. |

| Display Unit | |
|----------------------------|--|
| Model | HM-5818(19") |
| Display Resolution | 1280 x 1024 |
| Aspect Ratio | 4:3 |
| Screen Brightness | 450cd/m ² |
| Screen Size | 19 inch (376mm x 301mm) |
| Viewing Angle | Horizontal, 150° Vertical, 140° |
| Contrast Ratio | 800:1 |
| Model | HM-5818(24") |
| Display Resolution | 1920 x 1080 |
| Aspect Ratio | 16:9 |
| Screen Brightness | 1000cd/m ² |
| Screen Size | 24 inch (531mm x 299mm) |
| Viewing Angle | Horizontal, 170° Vertical, 160° |
| Contrast Ratio | 1000:1 |
| Model | HM-5818(26") |
| Display Resolution | 1920 x 1200 |
| Aspect Ratio | 16:10 |
| Screen Brightness | 600cd/m ² |
| Screen Size | 518mm x 324mm |
| Viewing Angle | Horizontal, 178° Vertical, 178° |
| Contrast Ratio | 1000:1 |
| Processor | |
| CPU | Intel Haswell/Broadwell U series 15W |
| Memory | DDR3-1066 MT/S 4GB |
| SSD | SSD 64GB |
| Audio | Audio ALC 662 HD Around a track+the microphone |
| I/O | 6 PIN |
| Ethernet | 1000Mbps |
| Power | AC 220V & AC 110V |
| Power Consumption | 17W or less (220 VDC) |
| Compass Input Port | Support |
| Log Device Input Port | Support |
| GNSS Port | Support 2 ports, |
| ARPA Input Port from Radar | Support |
| AIS Input Port | Support |
| Video Output Port | VGA, HDMI |
| USB | 4 ports, USB 2.0 type A |
| LAN Port | LAN1, LAN2 |
| Wi-Fi | 802.11b/g/n |
| 4G Module | LTE/GSM, Internal antenna, and support to connect external antenna |
| Environmental | |
| Operation Temperature | -15°C~+55°C |
| Storage Temperature | -20°C~+70°C |
| Language Switch | English, Chinese |
| Manual | English, Chinese |
| User Operation | Menu operation/double click/zoom by roller |
| Workstation | Split device |



ECDIS

Electronic Chart Display and Information System

HM-5818





Electronic Chart Display and Information System

Product Descriptions

The implementation and appliance of ECDIS have a lot of advantages. According to the optimization of time, velocity and other parameters, simplify the route planning. Considering the draught of the ship, and combining it with the danger zone or special attention areas, the safety factor of route planning can be much improved.

HM-5818(19"/24"/26") Electronic Chart Display and Information System (ECDIS) consist of host and display, there are different size of display, 19 inch, 24 inch and 26 inch, users can select according to their actual need. The ECDIS includes functions of electronic chart display and management, multiple methods for route design, route detection, navigation monitoring, etc.



1 User Interface
Simple, clear user interface, visually appealing and intuitive to use.

2 Convenient Signal Connection
Using NMEA0183 connection, simply connect with different navigation devices.

3 Chart Format
IHO S-57 Ed 3.0 vector chart. (IHO S-63 ENC data protection scheme)


4 Intuitive Route Planning and Navigation Monitoring
It offers a variety of ways route planning, route monitoring detection and navigation.

ECDIS Main Unit

- ◆ Pieces of industrial-grade computer
- ◆ Mixer Haswell Intel core CPU
- ◆ Memory: 4GB DDR3-1066 mt/S
- ◆ SSD: 32 GB
- ◆ Intel 1000M ethernet
- ◆ Signal input: optical coupling isolation




System Configuration

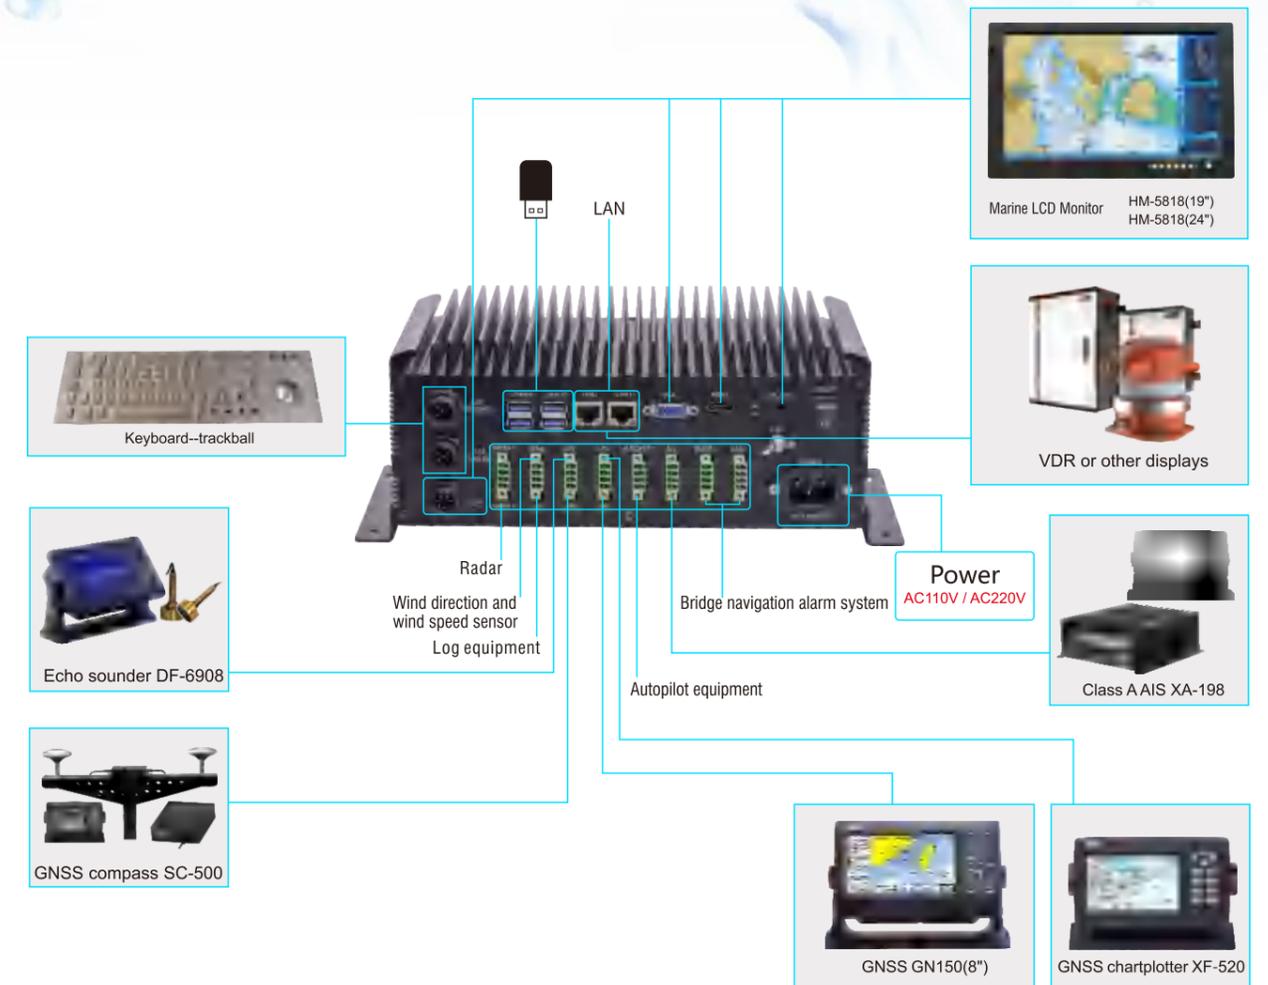

»» User Interface

- Center ship position
- Course-up/Head-Up /North-Up
- Relative motion/True motion
- Zoom out
- Zoom in
- Distance measurement
- Electronic bearing line/Variable Range Marker
- Display mode(daytime,dusk,night)
- System setting
- AIS Display Setting
- Chart standard display
- Alarm record
- Signal detection
- Software version
- MOB
- Power off

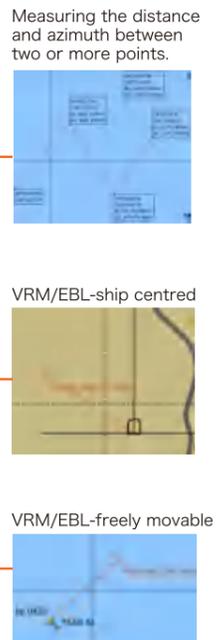

Time Display

| | |
|-----------|------------|
| Time | 2016-11-07 |
| Time zone | UTC+08:00 |

Data

| | | |
|--------|--------------|-------|
| HDG | 212.9° | CYRQ |
| STW | N/A | LOG |
| COG | 212.9° | 1,PS1 |
| SOG | 66.30kn | ESA |
| YPR | N/A | |
| POSN | 24°17.947'N | |
| GPS1 | 118°24.796'E | |
| WGS 84 | | |

Data Sources

Cursor-related Information

| | |
|-----------|-------------|
| Cursor | 24°13.599'N |
| Direction | 243.8° |
| Distance | 9.85nm |

Display Scale

| | |
|---------------|----------|
| Display scale | 1:320000 |
|---------------|----------|


Navigation Monitoring
Display basic information of route monitoring.

RouteMonitor

| | |
|-------------------|-------------|
| Route name | Route003 |
| Plan speed | 2.06kn |
| Plan direction | 128.6° |
| Save distance | 0.10nm |
| Yaw distance | -0.02nm |
| Yaw angle | -20.9° |
| Crt monitorly pnt | 1 |
| DTW | 18.58nm |
| TTG | 00d 09h 02m |
| Plan turn radius | 0.10nm |
| Plan turn rate | 0.33°/s |
| Next monitorly p | 2 |



Standard legend

| | |
|------------------|----------------|
| Depth Units | |
| Height Units | |
| Sounding Datum | Lowest as |
| Vertical Datum | Mean high |
| Horizontal Datum | Mean lower low |
| Edition Date | |
| Update Date | |
| Safety Contour | |
| Safety Depth | |
| Version Num | |
| Update Num | |
| Chart scale | |
| Quality of data | zone |
| Projection | |
| Presentation lib | |
| Var | 34! |

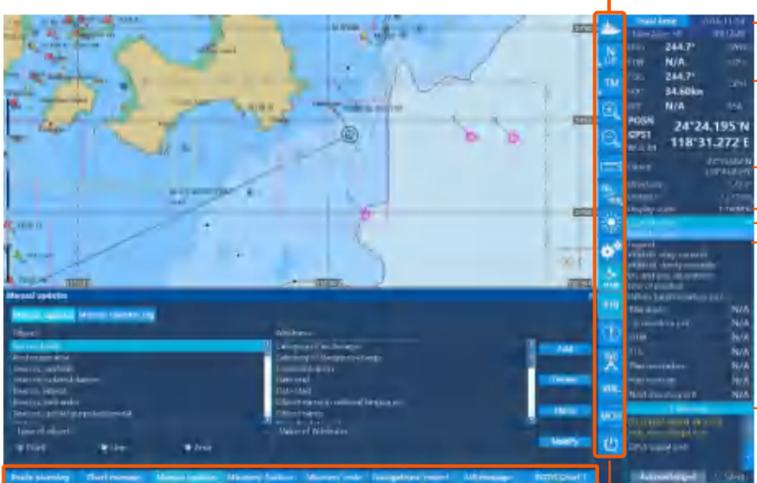

Menu bar Shortcuts

Lock Route
Completely displayed in the chart center at the largest scale.




»» Update Software Online

Build in 1000Mbps Ethernet, 4G and WIFI module to support update software online.



»» Electronic Chart Installation

As a manager of S-63 data protection solution, International Hydrographic Organization (IHO) provides self-signed SA certificate (in X509 format) for verifying if S-63 data packets of electronic charts come from data service providers of electronic charts authorized by IHO. XINUO ECDIS is compatible with multiple electronic charts by different data services providers. Unit licensing and product catalog are classified according to the data service providers.

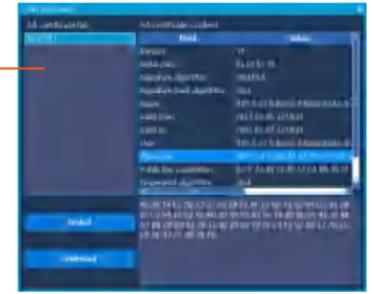

If the SA certificate valid, detailed information of the certificate will be show in its dialog box: " The SA certificate (public key) has been installed, the certificate will expire on March 3, 2033, or due to security reasons IHO redistribute the failure."

»» Route Planning

- Create New Route
User can add new route. On "route planning" menu, user can check or edit all parameters of way points on the route, include total numbers, name, coordinate, distance of off-route, etc. Also, user can check whether danger or special area is on the route after planning a route by "detection" tab on the menu.
- Monitoring Route
To monitor plan route, alarm will prompt when the ship sails on the voyage of the hazards and off course, the safety water depth etc. All of the sailing information can be check on the right side window, including course name, speed, heading, yaw Angle, distance to the next turning point steering radius, Angle, estimated sailing time and other information.
- Route Plan
For the voyage number of one navigation route,Input the departure time and arrival time, the system will count the speed and arrival time of every waypoint.




»» Trace Record

ECDIS can record the complete navigation track, save the record in every minutes for previous 12 hours. And record every 4 hours for previous 3 months most.



Highlight Checking Route



After route planning, user can evaluate the safety by checking all objects in chart according to the preset distance to the route.

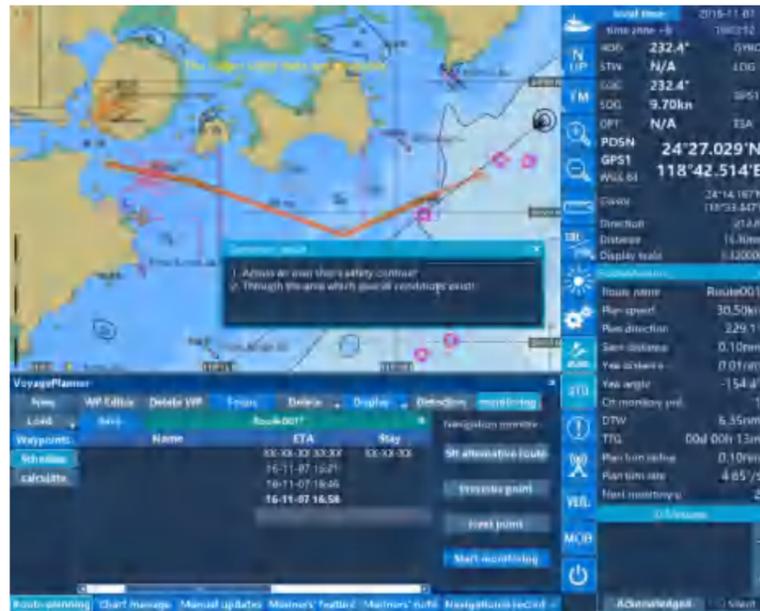

Close to the dangerous object, such as fixed or floating ship assistant or independent dangerous object.

Close to restricted navigation area or other special area.

Across the safety isobath.

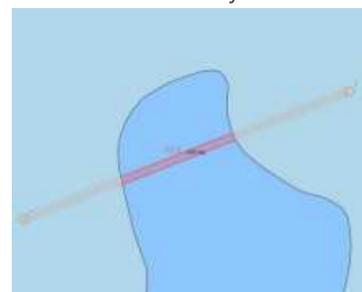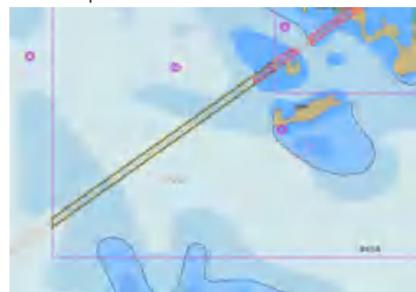

If the ship route matches the above cases, software will highlight the relevant object in red or yellow according to the dangerous degree to remind the user to revise the route to ensure navigation safety.

ECDIS Chart 1

ECDIS Chart 1 is used for users to recognize and become familiar with the chart object. The user can get details of chart objects by clicking the object.



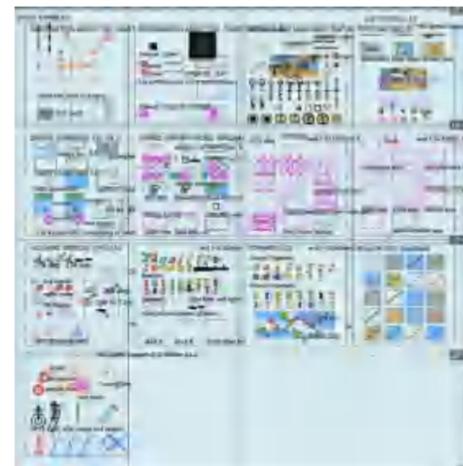


Chart Display Mode


Basic display mode
Only basic chart information is displayed based on the basic display of ECDIS, but the user can customize the display.

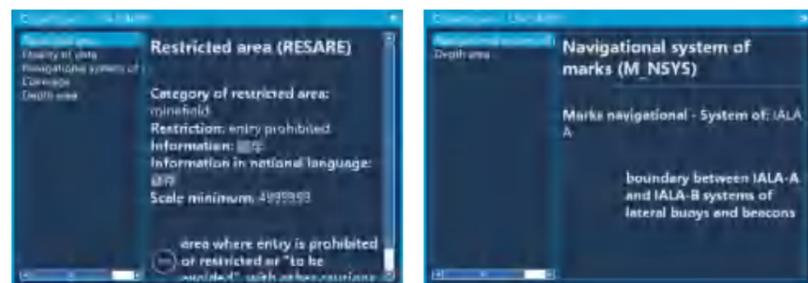

Standard display
Based on the basic display and adds the display of some important targets. The user can customize the display category.

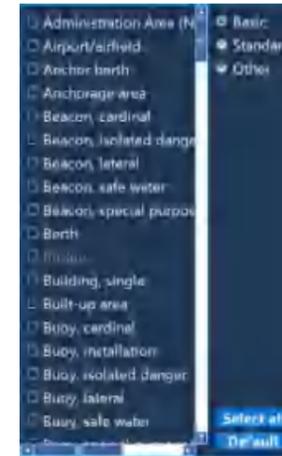

Other display
Based on the standard display and the basic display, the unit includes other display modes. The user can customize the display category.

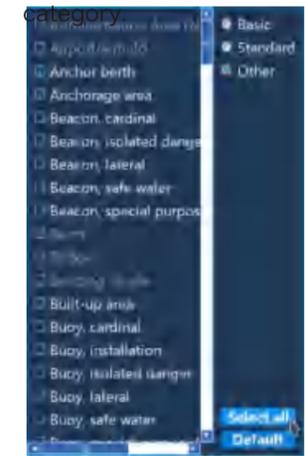

AIS target

AIS list includes all AIS ships in the vicinity, summarized. The user can visually see the AIS ship MMSI, ship name, distance, speed, location, approach time, approach distance, and other information. The user can also get the location of each AIS ship and other information directly on the chart.


AIS CPA
The approach alarm will be given in case that the distance for the other ship to approach the own-ship within the set time to approach is lower than the set distance to approach.

Filter the sleeping AIS target
The target sleep condition can be set to filter out AIS targets that are not of interest.

- The following three filter conditions are available:
1. CLASS A / B
 2. The distance between the target and the ship
 3. Approach




AIS sleep target

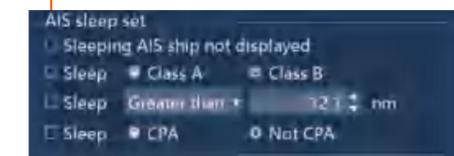





Manual Update

Nautical personnel can use non-integrated updates in the manual entry display. The system updates manually through point objects, simple line objects, and area objects such as the routing scheme and the navigation area. For manual updates, the system automatically checks for updates and related indications and alarms like the integrated ENC update. Not only can add, delete, move, modify and other operations, and each operation time, type, chart units, objects and other information will be saved to the manual update log inside.

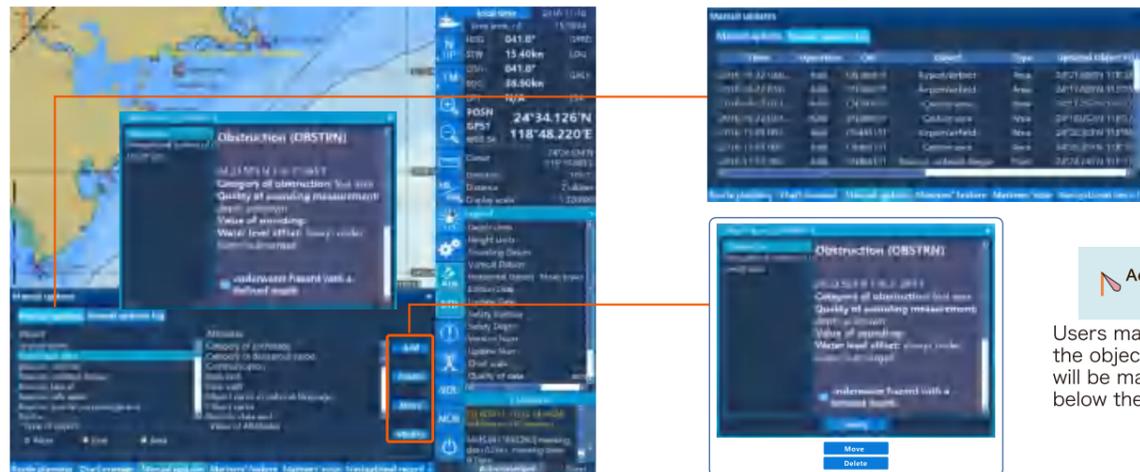

Aero FR m
Users manually update the object, The objects will be marked orange below them.

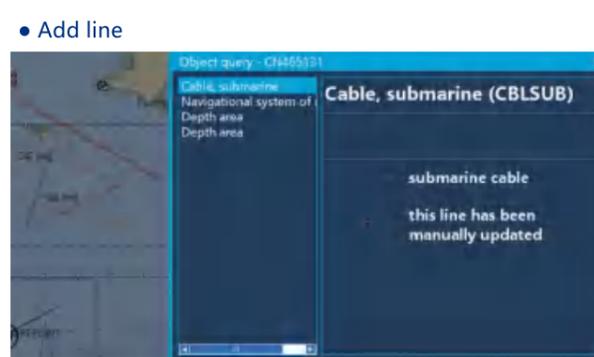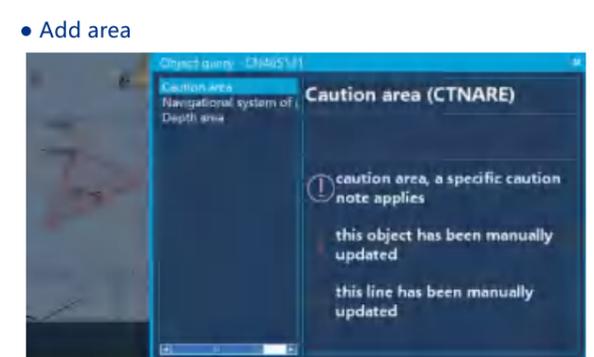

ECDIS Training

In order to make sure all the user can operate the ECDIS under safety and efficient, it is necessary to have a training. ECDIS implementation on board is an investment that benefits from the many advantages ECDIS offers and the shipowner, such as reducing the time spent on chart management and voyage planning, as well as achieving greater security through proper setup and operation of ECDIS, thus significantly reducing stranding risks. Training should be provided in a variety of forms, and the crew should receive general training to fully understand the ECDIS concept, the ECDIS management rules and the impact on bridge operation, and specific types of ECDIS training, which would help the operator to become familiar with the specific ship Contained ECDIS.

The operation of the training which is organized by XINUO include: on-site installation, commissioning, ECDIS operation, chart operations, hardware maintenance and so on. the trainees should participate in an assessment after passing the examination and will be issued a training certificate, obtain a certificate before boarding operation ECDIS.

The training program is as follows:

- System description
- Be familiar with the menu structure
- Route planning
- Manual Update
- Crew object
- Navigation records
- Load and update charts and licenses
- Update the software
- Hardware maintenance



ECDIS After-sales Service

It is also true that the proper working conditions are present and the failure of the equipment in the voyage may adversely affect the safety and efficiency of the ship at sea. Usually, there are two main reasons for device failure: a defect in the device itself, and improper installation and setup of the device. XINUO will conduct an overall inspection on the product before it being installed and have a thorough test on the product before it being delivered to the vessel.




»» ECDIS Color Platte



»» Anti dazzle, Highlighting, Wide viewing angles

Anti Apparent Fatigue Clear and Comfortable


- Anti dazzle
- Anti flash point
- Anti reflection


VS


> Anti dazzle screen
> Common screen

»» ECDIS Installation Timetable


At the NAV-54 meeting in 2008, the International Maritime Organization (IMO) enforce all international vessels over 3,000 gross ton (passenger ships over 500 gross ton) to install ECDIS. The as shown in the diagram below. A new equipment will be required to install an ECDIS, as well as suitable backup arrangements. The backup can be another type of approved ECDIS or the official latest paper chart.

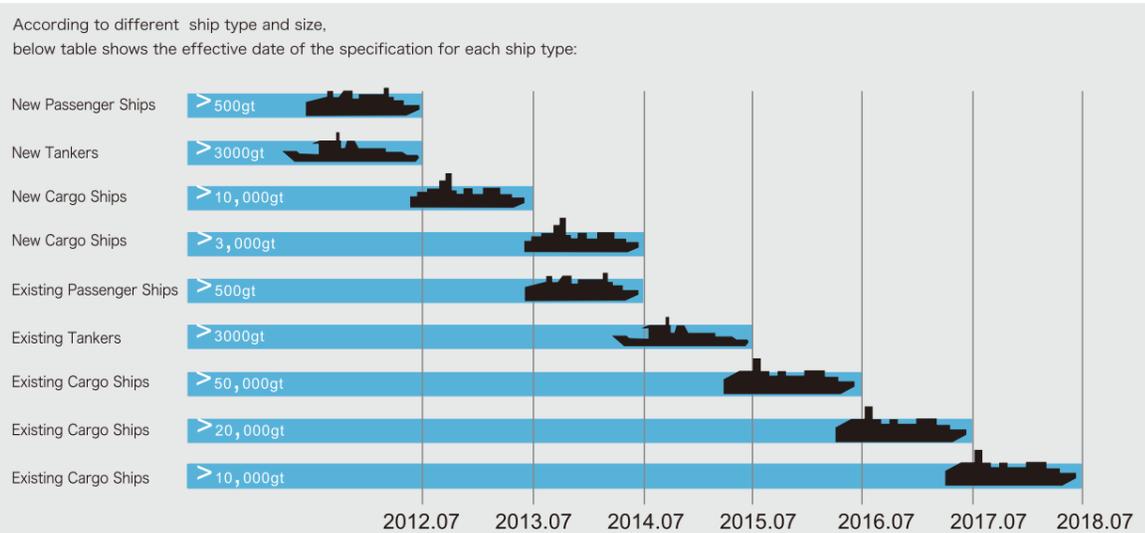


Display Unit Installation Dimensions (Unit: mm)

- 19"
- 24"
- 26"


»» 19 inch Counter Mounting:

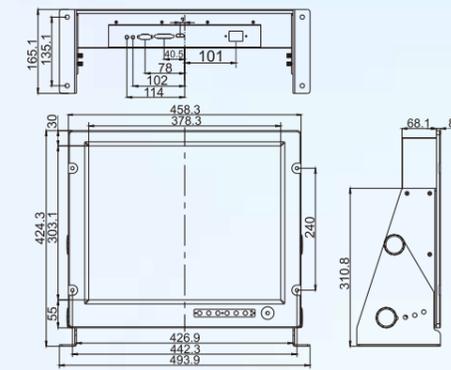


Flush Mounting:

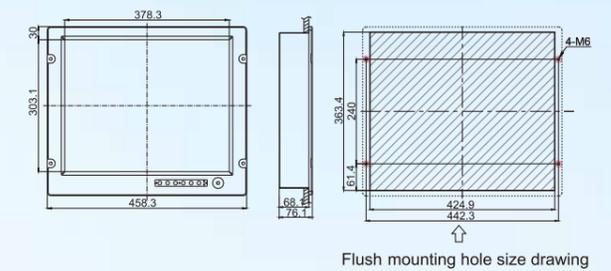


»» 24 inch Counter Mounting:

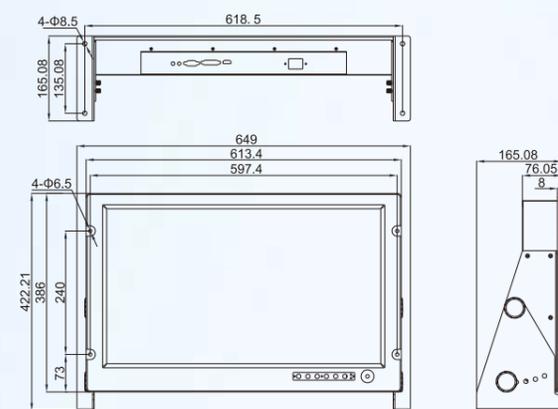


Flush Mounting:

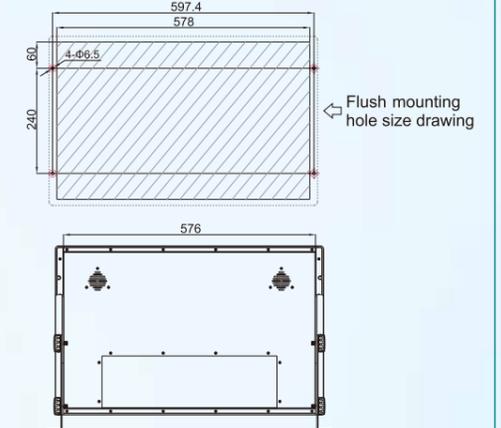


»» 26 inch Counter Mounting:

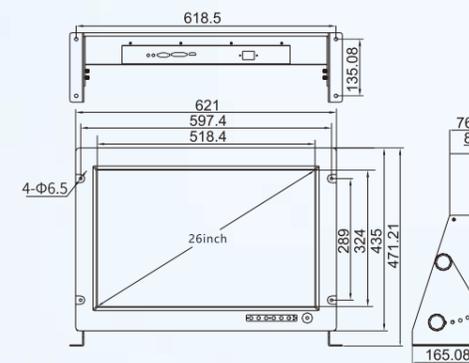

Flush Mounting:

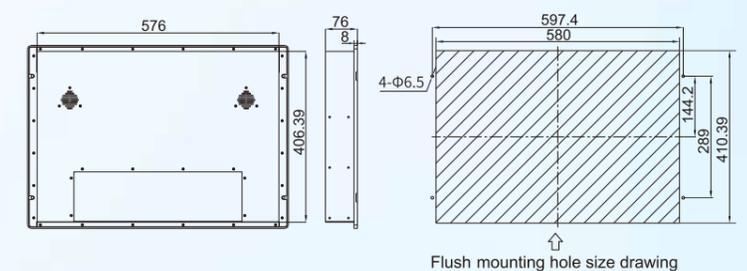

Processor

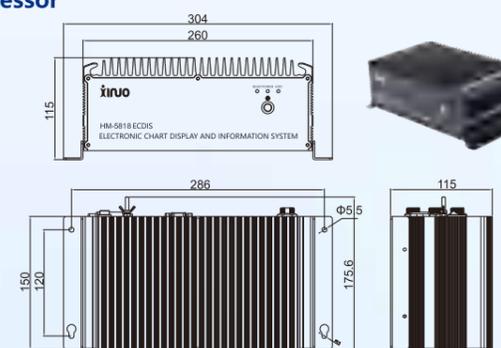

Operation Unit

