

Digital Echo Sounder

Model: DF-6908

Approved by the China Classification Society(CCS)



Features

- ▶ High-contrast 8-inch color LCD display, 1024 X 600 high resolution.
- ▶ Adopt High precision digital signal processing technology(DSP).
- ▶ Detect 0.2m ultra-low water level.
- ▶ Built in large capacity memory, with the function of storing and replaying water depth data; The echo data can be adjusted during playback (range, gain, color can be adjusted).
- ▶ Multiple protection: over voltage protection, over current protection, reverse connection protection.
- ▶ Built in WiFi module.
- ▶ Automatic function permits unattended adjustment of range. The range scale automatically change to display the bottom.
- ▶ NMEA0183 input/output.
- ▶ Support SD card and USB upgrade.


Specifications

Display Unit	DF-6908
Size	8 inch
Resolution	1024X600
Voltage Range	DC 12V~36V
Brightness	500cd/m ²
Voltage Detection	Voltage detection function
Power Protection	Over voltage protection, over current protection and reverse connection protection
NMEA 0183	One input, one output and one alarm interface
Upgrade Mode	USB, SD
Echo Sounder	
Transmission Power	300W/300W
Transmission Frequency	200KHz/200KHz
Transmission Firing Times	60 times/second at maximum
Transmission Pulse Width	50us~3ms
Basic Range	0~300m, 0~300fm, 0~1000ft
Depth Unit	m, fm, ft
Alarm Function	Depth Alarm, Voltage alarm, Sound and light alarm
Language	Chinese, English
Image Speed	stop, *1/8, *1/4, *1/2, *1, *2, *4
Presentation Colors	256colors, 16colors, 8colors, Monochrome
Background	White, Blue, Black
Time Scale	10s, Uninterrupted cycle
Graduated Scale	Scale line, Cursor line
Modes	Single channel 1, Single channel 2, Dual channel left&right, Dual channel up&down, A mode, analog mode
Input Data	IEC61162-1(NMEA0183)
Output Data	IEC61162-1(NMEA0183) DPT
Storage Function	With the function of storage and playback, it can store at least 12 hours of water depth data
Enviromental	
Working Temperature	-15°C~+55°C
Storage Temperature	-30°C~+70°C
Display unit Waterproof	IP65
Transducer Waterproof	IP66


DF-6908

[Unit: mm]

Counter Mounting

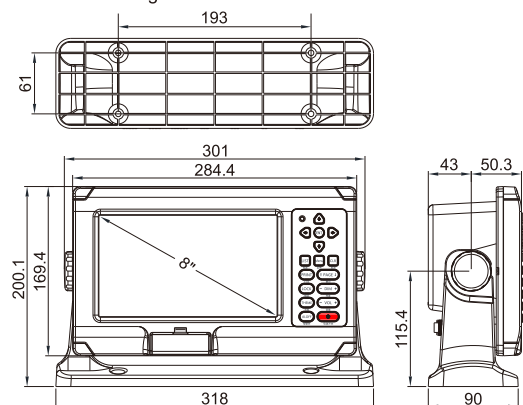

Flush Mounting

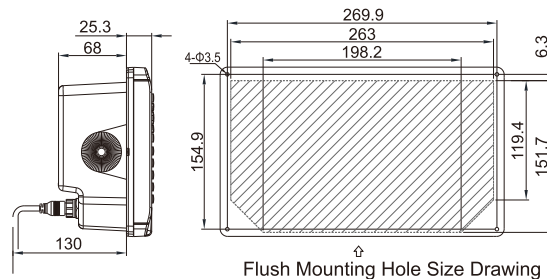

XINUO

Xinuo Information Technology (Xiamen) Corporation Limited

Address: Unit 2001, 1 Chengyi North Street (B04), Software Park III, Xiamen, China

Tel: +86-592-3300300

Fax: +86-592-3300310

Hotline: 400-8868-592

Web: <http://www.xinuo.com>

Email: info@xinuo.com



NEEQ:836189